

Specifications:

Current rating:1.0A AC/DC

Voltage rating:50V AC/DC

Contact resistance:20m ohm. max.

Insulation resistance:500M ohm. Min.

Withstanding voltage:500V AC for one minute

Operating temperature range:-25°C to +105°C

Material and Finish:


Insulator:High Temp. Plastic(PBT UL94V-0)

Standard Color:Black

Contact:Phosphor bronze

Plated:Glod Plated

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	2.54	1.27	30	19.05	17.78	56	35.56	34.29	82	52.07	50.80
6	3.81	2.54	32	20.32	19.05	58	36.83	35.56	84	53.34	52.07
8	5.08	3.81	34	21.59	20.32	60	38.10	36.83	86	54.61	53.34
10	6.35	5.08	36	22.86	21.59	62	39.37	38.10	88	55.88	54.61
12	7.62	6.35	38	24.13	22.86	64	40.64	39.37	90	57.15	55.88
14	8.89	7.62	40	25.40	24.13	66	41.91	40.64	92	58.42	57.15
16	10.16	8.89	42	26.67	25.40	68	43.18	41.91	94	59.69	58.42
18	11.43	10.16	44	27.94	26.67	70	44.45	43.18	96	60.96	59.69
20	12.70	11.43	46	29.21	27.94	72	45.72	44.45	98	62.23	60.96
22	13.97	12.70	48	30.48	29.21	74	46.99	45.72	100	63.50	62.23
24	15.24	13.97	50	31.75	30.48	76	48.26	46.99			
26	16.51	15.24	52	33.02	31.75	78	49.53	48.26			
28	17.78	16.51	54	34.29	33.02	80	50.80	49.53			

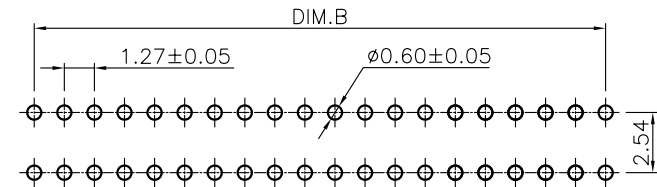

P.C.B. LAYOUT

RoHS Compliant



GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:

DESCRIPTION:

1.27*2.54mm PCB Socket 4.6mm Height

PART NO:

PB40D-1.27MM

SIZE

A4