


CODIGO	DESCRIPCION
DT-25-A02W-XX	A panel 10A 300V X polos

Barrier Style Terminal Blocks / DT-2

DT-2X-A02X-XX

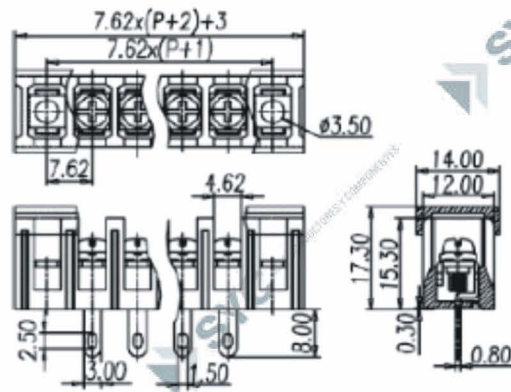

Pitch: 7.62mm

ORDER GUIDE

DT - 2 - **01** -

- Pole size: 02~34P
- N : Round head screw
- W : Screw with washer
- A : Mount Ends
- B : Barrier Ends
- C/G : With cover
- N/T : Without cover

Approval	
Materials	
Rated voltage	300V
Rated current	15A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Brass, 0.8t, Tin plated
Screw	Steel, M3, Nickel plated

Specifications	
Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC500V
Wire range	22 ~ 14 AWG
Rated Torque Value	8Kg - cm