






CODIGO

1200P-XXA

DESCRIPCION

Minidin X vias macho a cable

					
3	4	5	6	7	8








TABLE A

	7.0ø BACK SHELL
	6.0ø BACK SHELL
	5.0ø BACK SHELL (STANDARD)
	COVER DIM.

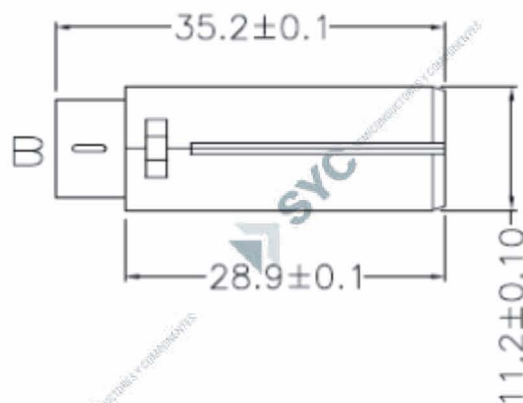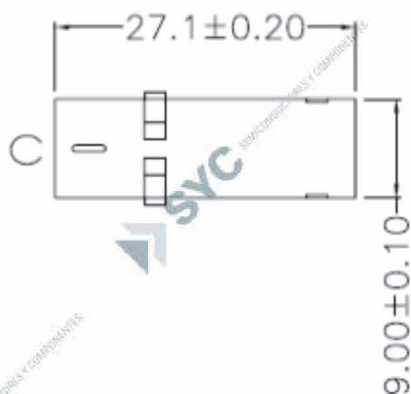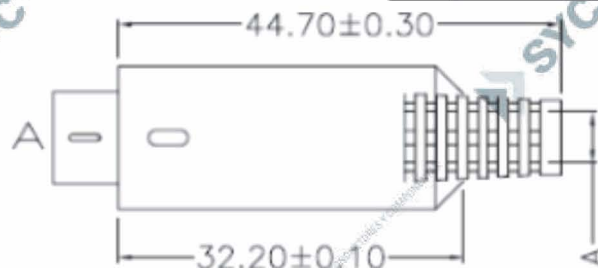

GENERAL TOLERANCE:

.X=±0.2

.XX=±0.15

SPECIFICATIONS:

- 1.RATING:11V AC 1A MAX
OR 12V DC 2A MAX
- 2.INSULATION RESISTANCE:
50M OHM MIN AT 500V DC.
- 3.DIELECTRIC STRENGTH:
500V AC / 1 MINUTE.
- 4.Operating Temperature Range: -40°C To +105°C

MATERIAL:

- A:COVER: PE+2L
B:SHELL: ABS
C:METAL SHIELD
BRASS NICKEL PLATED
D:HOUSING: NYLON66+GF
E:CONTACT:
BRASS SILVER PLATED

How to order

1200 P-XXA

1. P:Plug
2. S:Jack
No. of contact
(3~8Pin)