

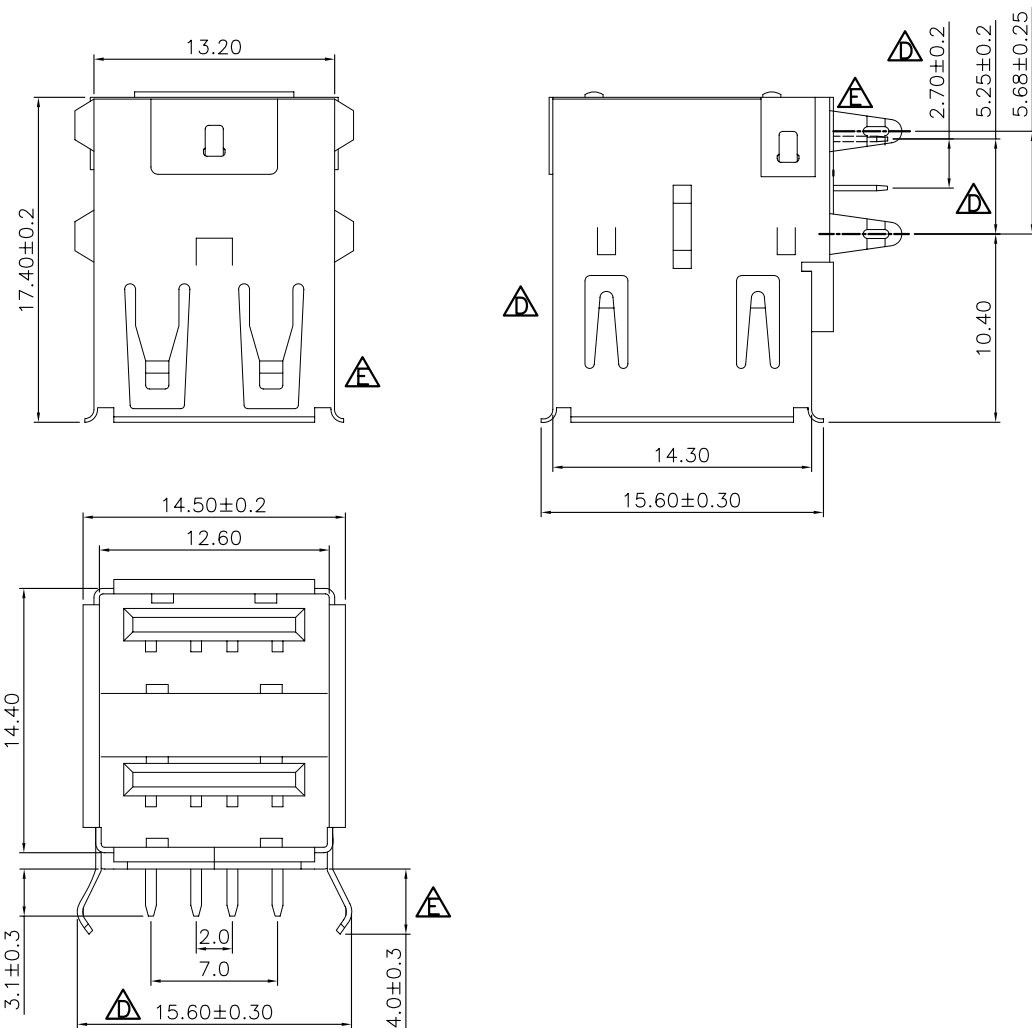
1

2

3

4

5



Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:750V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:PBT (UL94V-0)


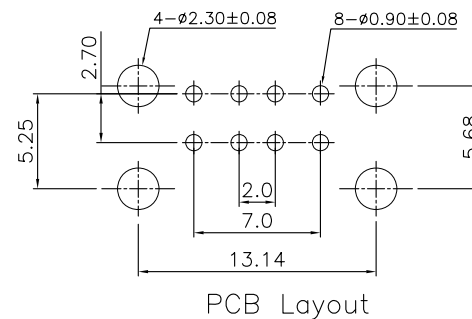
Contact:Phosphor Bronze

Plating:Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

Back_Cover:SPCC,Matte Nickel Plated

**5075AR-04-2****CONECTOR USB A P/PCB 90* DOBLE**

PCB Layout

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:

DESCRIPTION:

Double USB A Socket Right Angle Type

SIZE

A4