
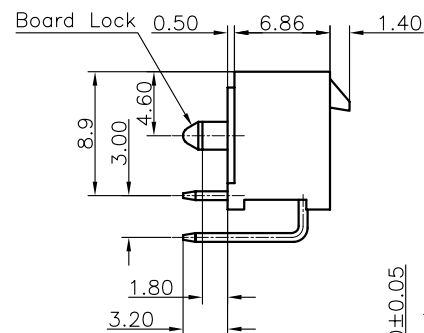
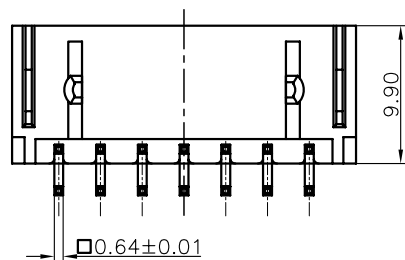


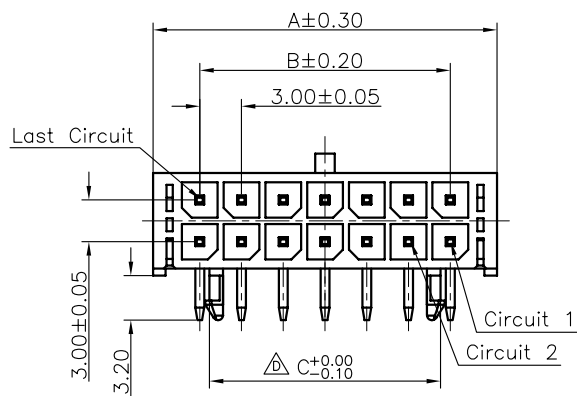

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
2	6.7	—	2.9	14	24.7	18.0	16.6
4	9.7	3.0	2.9	16	27.7	21.0	19.6
6	12.7	6.0	2.9	18	30.7	24.0	22.6
8	15.7	9.0	7.6	20	33.7	27.0	25.6
10	18.7	12.0	10.6	22	36.7	30.0	28.6
12	21.7	15.0	13.6	24	39.7	33.0	31.6

Specifications:

Current rating:5.0A AC,DC

Voltage rating:250V AC, DC

Contact tesistance:10m ohm Max

Insulation resistance:1000M ohm Min

Withstanding voltage:AC 1500V AC/minute

Operating Temperature:-25°C ~ +105°C

Materials:

Insulator:High Temp Plastic (Nylon 46 UL94V-0)

Insulator Color:Black




Contact :Copper Alloy

Finish:Tin Plated

How to Order

5561R-XX

No.Of Positions
Right Angle

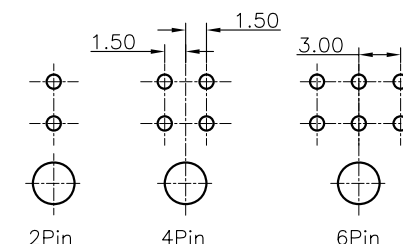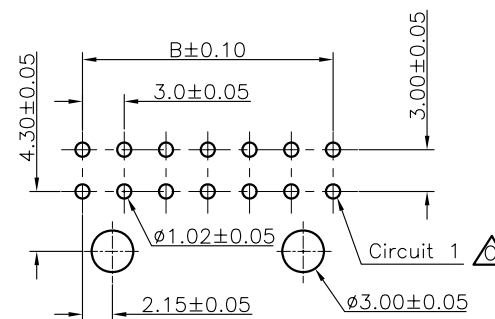

PCB Layout

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.2


.XX=±0.15

UNIT: MM

SCALE:

SHEET: 1 /2

PROJECTION:



DESCRIPTION:













3.0mm Pitch Power Wafer Right Angle Type

PART NO:

5561R-XX

SIZE

A4

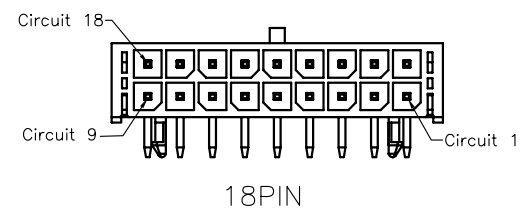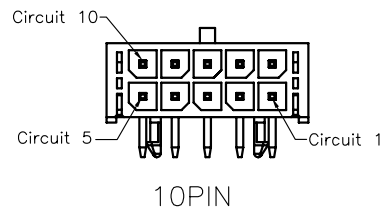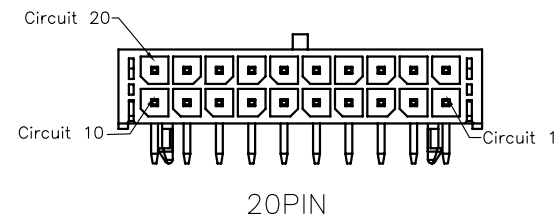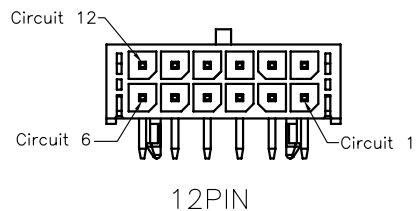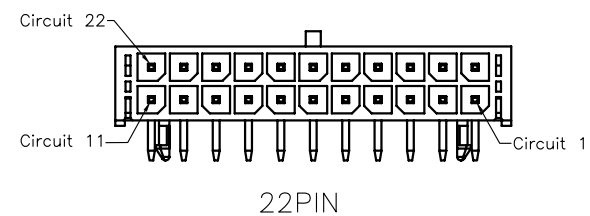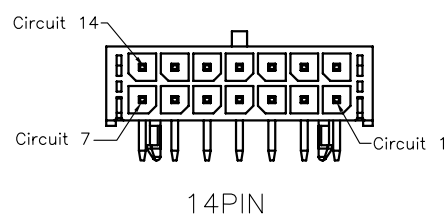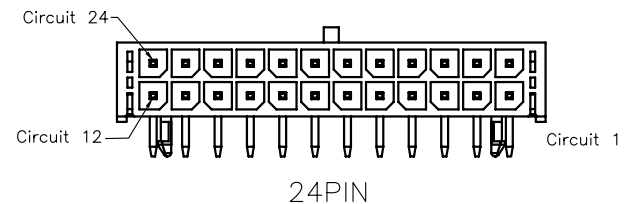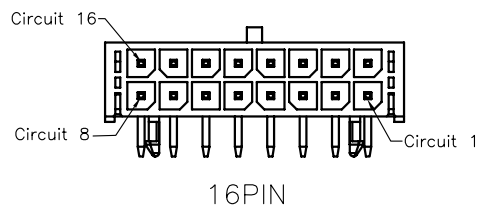

2~24P Protection Key Drawing(Ref.)

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		SIZE A4
UNIT: MM	DESCRIPTION:	
SCALE:1:1	3.0mm Power Wafer Protection key Drawing	
SHEET: 2 / 2	PART NO:	
PROJECTION:	5561R-XX	