

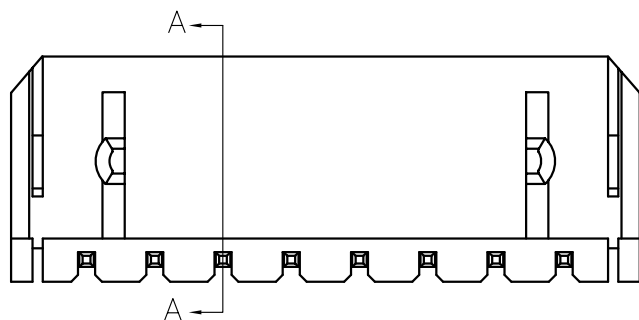


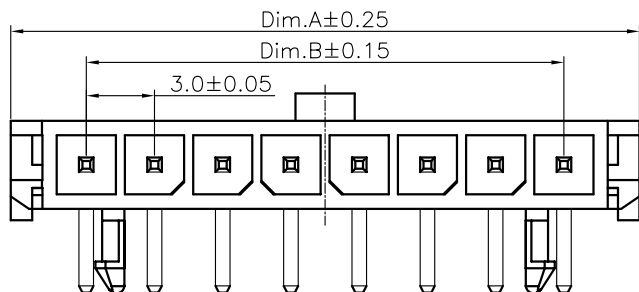


Specifications:

Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:1,500V AC For One Minute
Operating Temperature Range:−25°C ~ +105°C
Material and Finish
Insulator:High Temp. Plastic(Nylon 46 UL94V-0)
Insulator Color:Black
Contact:Copper Alloy
Plating:Tin Plated
How to order
5561RA-XX

No. Of Positions
RA:Right Angle

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00		8	27.65	21.00	16.70
3	12.65	6.00		9	30.65	24.00	19.70
4	15.65	9.00	4.70	10	33.65	27.00	22.70
5	18.65	12.00	7.70	11	36.65	30.00	25.70
6	21.65	15.00	10.70	12	39.65	33.00	28.70
7	24.65	18.00	13.70				

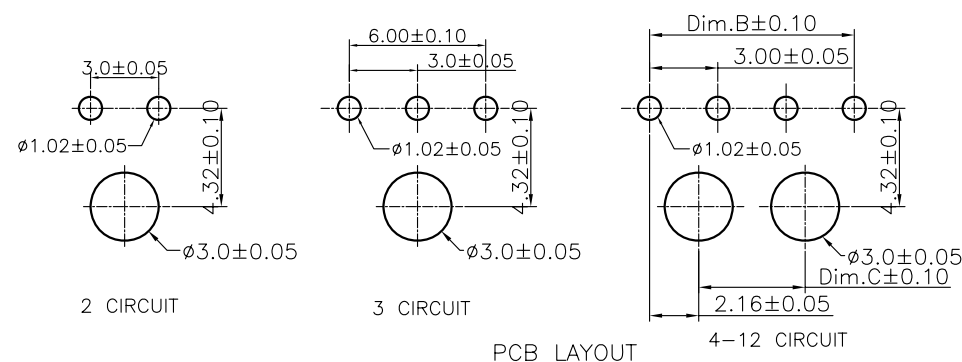

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.20


.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:



DESCRIPTION:


3.0mm Wafer Single Row 90° Type

PART NO:

5561RA-XX

SIZE

A4

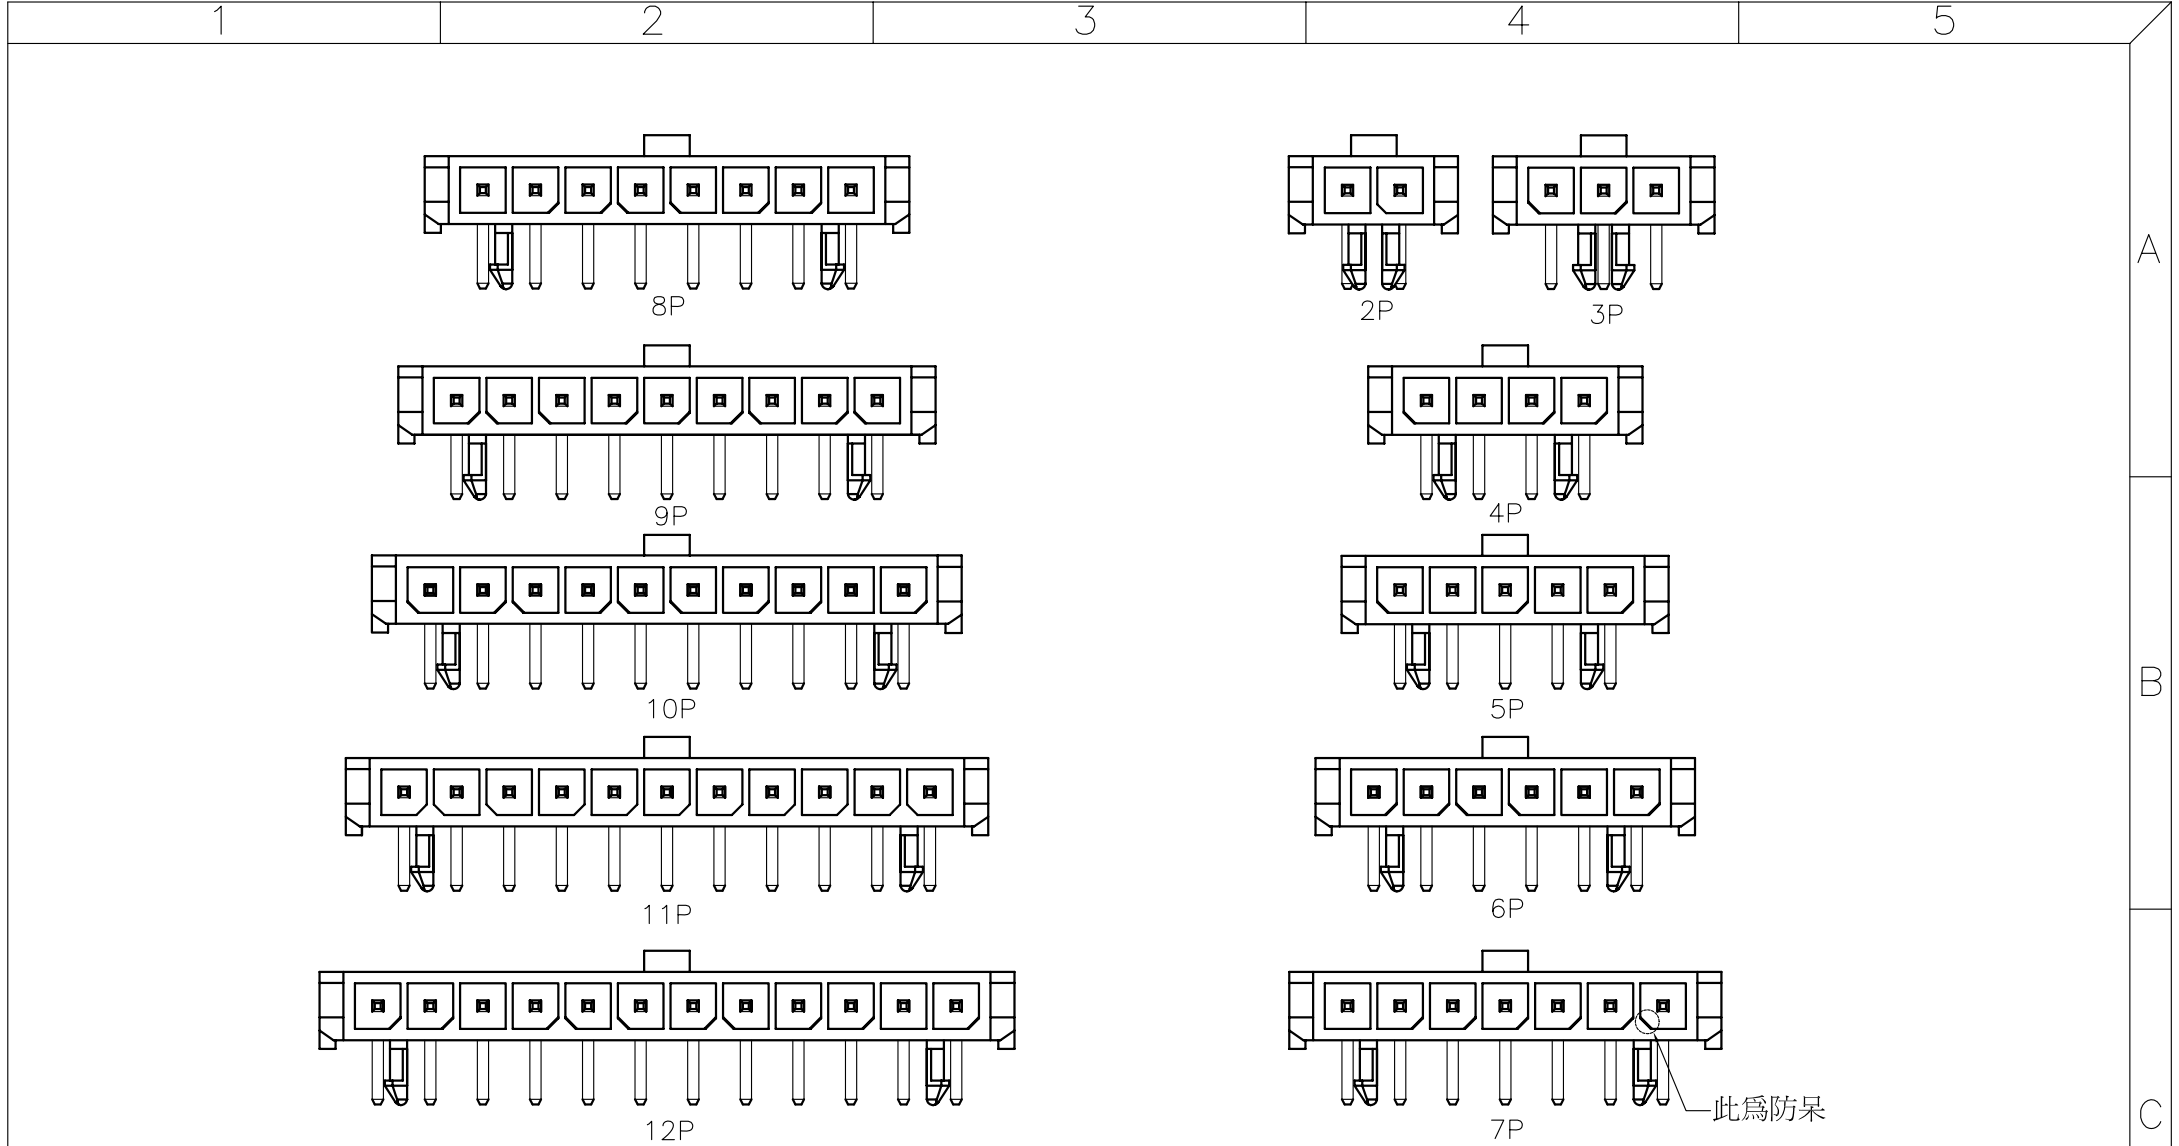

5561RA-XX (2-12)Pin防呆位置分部示意圖

RoHS Compliant

GENERAL TOLERANCE: .X=±0.10 .XX=±0.05 .XXX=±0.03		SIZE A4
UNIT: MM	DESCRIPTION: 3.0mm Wafer Single Row 90° Type	
SCALE:1:1	PART NO: 5561RA-XX	
SHEET: 2/2		
PROJECTION:		