


Specifications:


Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:1,500V AC For One Minute
Operating Temperature Range:-25°C ~ +105°C
Material and Finish
Insulator:High Temp. Plastic(Nylon 46 UL94V-0)
Contact:Copper Alloy
Plating:Tin Plated

How To Order
5561SA-XX

No. of Positions
S:Single Row&Straight Type



Positions	Dimension		Positions	Dimension	
	A	B		A	B
2	9.65	3.00	8	27.65	21.00
3	12.65	6.00	9	30.65	24.00
4	15.65	9.00	10	33.65	27.00
5	18.65	12.00	11	36.65	30.00
6	21.65	15.00	12	39.65	33.00
7	24.65	18.00			

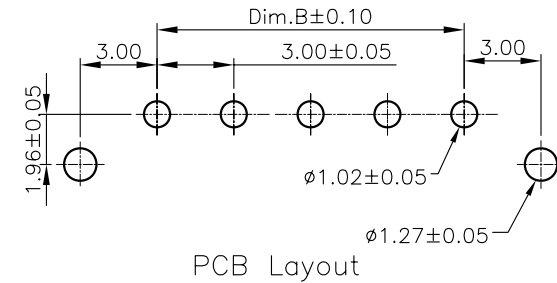

RoHS Compliant

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
UNIT: MM	DESCRIPTION:	SIZE
SCALE:1:1	3.0mm Wafer Single Row Straight Type	A4
SHEET: 1 / 2	PART NO:	
PROJECTION:	5561SA-XX	


1

2


3

4

5

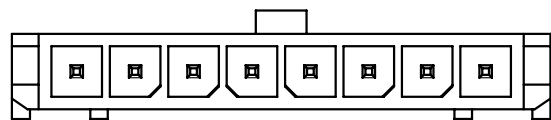


8P




2P


3P

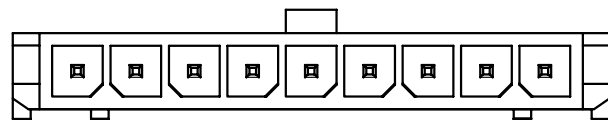


9P




4P

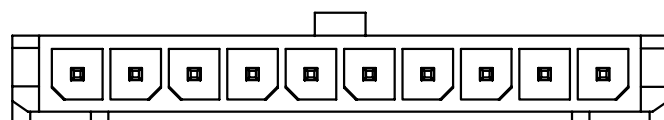


10P




5P




11P

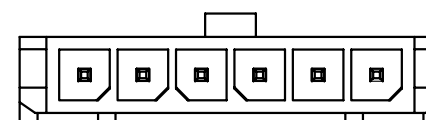

6P

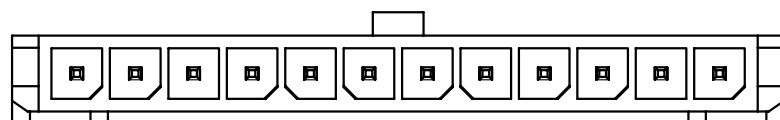

12P



7P

此為防呆

5561SA-XX (2-12)Pin防呆位置分部示意圖

GENERAL TOLERANCE:

.X=±0.10

.XX=±0.05


.XXX=±0.03

UNIT: MM

SCALE: 1:1

SHEET: 2/2

PROJECTION:



DESCRIPTION:

3.0mm Wafer Single Row Straight Type

PART NO:

5561SA-XX

SIZE

A4

A

B

C

D