


**CODIGO**

IDCXX

**DESCRIPCION**

Hembra para cable plano de X vias

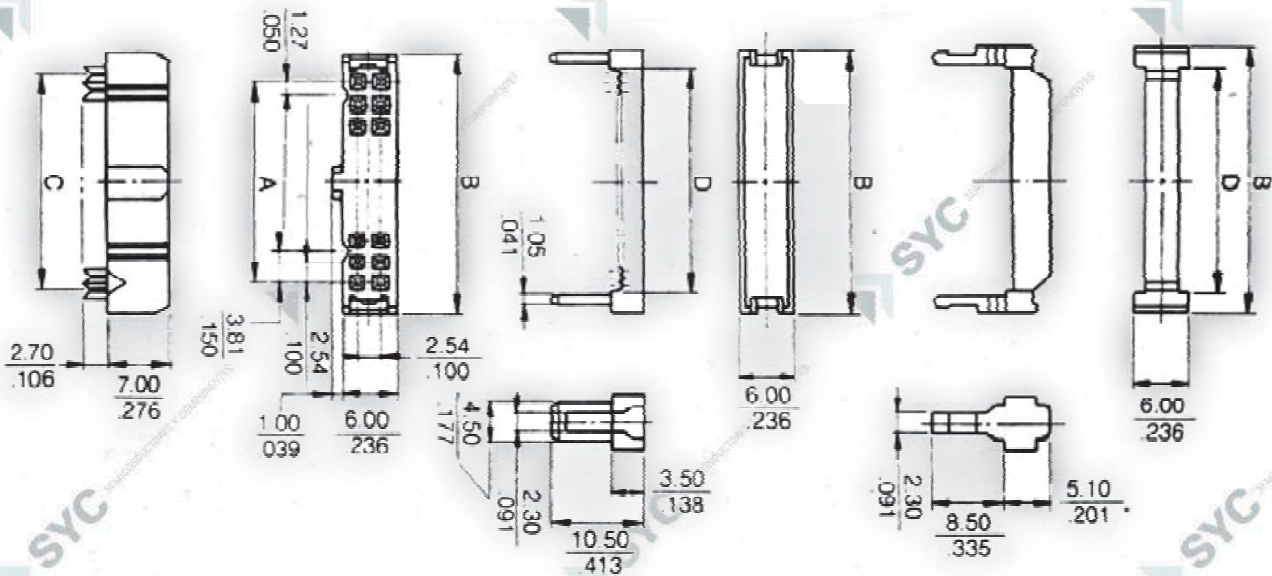

CIRCUITS	A	B	C	D
10	10.16 ( .400)	17.27 ( .680)	11.43 ( .450)	12.80 ( .504)
14	15.24 ( .600)	22.35 ( .880)	16.51 ( .650)	17.88 ( .704)
16	17.78 ( .700)	24.89 ( .980)	19.05 ( .750)	20.42 ( .804)
20	22.86 ( .900)	29.97 (1.180)	24.13 ( .950)	25.50 (1.004)
24	27.94 (1.100)	35.05 (1.380)	29.21 (1.150)	30.58 (1.204)
26	30.48 (1.200)	37.59 (1.480)	31.75 (1.250)	33.12 (1.304)
30	35.56 (1.400)	42.67 (1.680)	36.83 (1.450)	38.20 (1.504)
34	40.64 (1.600)	47.75 (1.880)	41.91 (1.650)	43.28 (1.704)
40	48.26 (1.900)	55.37 (2.180)	49.53 (1.950)	50.90 (2.004)
50	60.96 (2.400)	68.07 (2.680)	62.23 (2.450)	63.60 (2.504)
56	68.58 (2.700)	75.69 (2.980)	69.85 (2.750)	71.22 (2.804)
60	73.66 (2.900)	80.77 (3.180)	74.93 (2.950)	76.30 (3.004)
62	76.20 (3.000)	83.31 (3.280)	77.47 (3.050)	78.84 (3.104)
64	78.74 (3.100)	85.85 (3.380)	80.01 (3.150)	81.38 (3.204)