



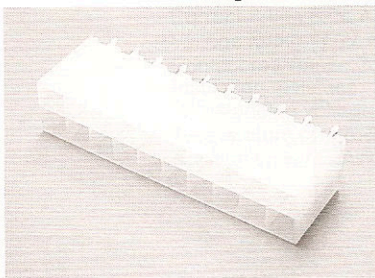


4.2mm Header Straight



P.C.B. LAYOUT

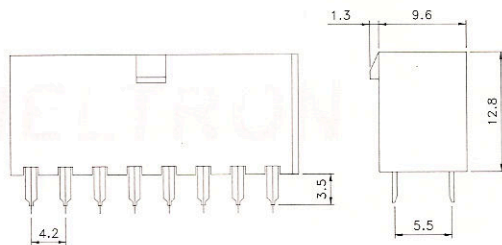

5566S-XX

SPECIFICATIONS:

- Current rating: 7.0A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20M Ω max
- Insulation resistance: 1,000M Ω min
- Withstanding voltage: 1,500V AC/minute
- Temperature range: -25 $^{\circ}$ C to +125 $^{\circ}$ C

MATERIAL:

- Insulator: Nylon 66 UL94V-0
- Contact: Brass
- Finish: Tin Plated

ORDERING INFORMATION:

5566S-XX

- Number Of Positions
- S: Straight

UNIT : mm

CIRCUITS	DIM. A	DIM. B
2		5.40
4	4.20	9.60
6	8.40	13.80
8	12.60	18.00
10	16.80	22.20
12	21.00	26.40
14	25.20	30.60
16	29.40	34.80
18	33.60	39.00
20	37.80	43.20
22	42.00	47.40
24	46.20	51.60