


**CODIGO**

PBXXD-H

**DESCRIPCION**

Hembra .1" x .1" X vias recto

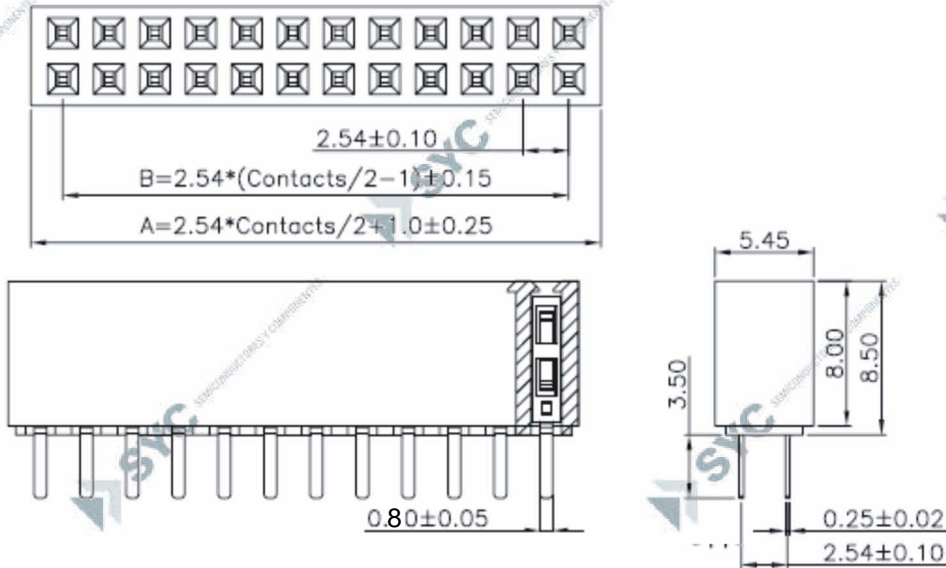

Dimension :

| Poles | DIM:(mm) |       | Poles | DIM:(mm) |       | Poles | DIM:(mm) |       | Poles | DIM:(mm) |       |
|-------|----------|-------|-------|----------|-------|-------|----------|-------|-------|----------|-------|
|       | A        | B     |       | A        | B     |       | A        | B     |       | A        | B     |
| 4     | 6.08     | 2.54  | 24    | 31.48    | 27.94 | 44    | 56.88    | 53.34 | 64    | 82.28    | 78.74 |
| 6     | 8.62     | 5.08  | 26    | 34.02    | 30.48 | 46    | 59.42    | 55.88 | 66    | 84.82    | 81.28 |
| 8     | 11.16    | 7.62  | 28    | 36.56    | 33.02 | 48    | 61.96    | 58.42 | 68    | 87.36    | 83.82 |
| 10    | 13.70    | 10.16 | 30    | 39.10    | 35.56 | 50    | 64.50    | 60.96 | 70    | 89.90    | 86.36 |
| 12    | 16.24    | 12.70 | 32    | 41.64    | 38.10 | 52    | 67.04    | 63.50 | 72    | 92.44    | 88.90 |
| 14    | 18.78    | 15.24 | 34    | 44.18    | 40.64 | 54    | 69.58    | 66.04 | 74    | 94.98    | 91.44 |
| 16    | 21.32    | 17.78 | 36    | 46.72    | 43.18 | 56    | 72.12    | 68.58 | 76    | 97.52    | 93.98 |
| 18    | 23.86    | 20.32 | 38    | 49.26    | 45.72 | 58    | 74.66    | 71.12 | 78    | 100.06   | 96.52 |
| 20    | 26.40    | 22.86 | 40    | 51.8     | 48.26 | 60    | 77.20    | 73.66 | 80    | 102.60   | 99.06 |
| 22    | 28.94    | 25.40 | 42    | 54.34    | 50.80 | 62    | 79.74    | 76.20 |       |          |       |

Specifications:

- Current rating: 3.0A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20m ohm max.
- Insulation resistance: 1000M ohm min.
- Withstanding voltage: 600V AC/minute
- Operating Temperature range:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Material:

- Insulator: High Temp Plastic (Nylon 6T UL94V-0)
- Standard Color: Black
- Contact: Phosphor Bronze
- Finish: Gold Plated

