


CODIGO	DESCRIPCION
LLAV-MICROE-56C	LLAVE ON-ON SPDT 3.0A 3P C/CAP

Specification:






1. Rating: 6A 125VAC;3A 250VAC
2. Contact Resistance: 20mΩ max.
3. Insulation Resistance: 500VDC 1000mΩ min.
4. Dielectric Strength: 1500VAC, 1Minute
5. Operating Temperature: -55°C~+85°C
6. Electrical Life: 20,000 Cycles

Plastic Flat(E)

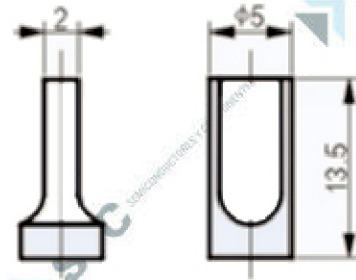

Solder terminal(1)

Nameplate

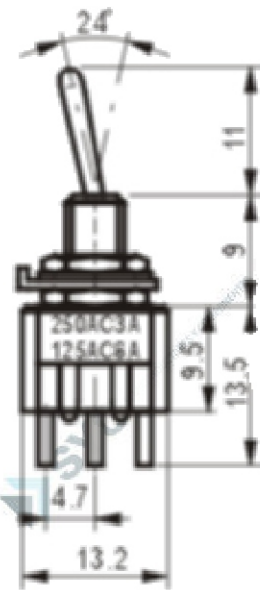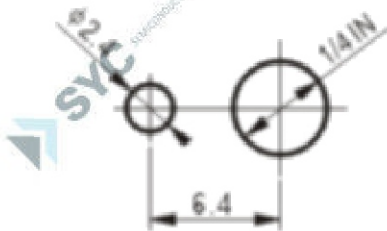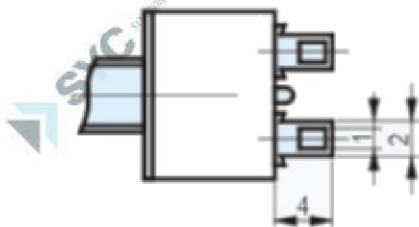

unit:mm