


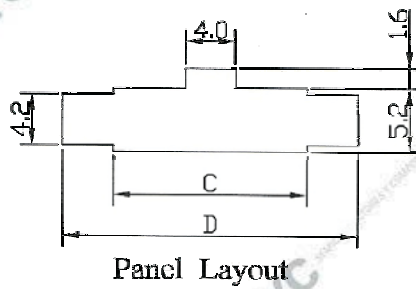


**CODIGO**

2018P-XX

**DESCRIPCION**

Plug a cable 2.54mm de XX vias



**SPECIFICATION:**

PITCH BETWEEN POLES : 2.5mm

CURRENT RATING : 3A AC/DC

VOLTAGE RATING : 250V AC/DC

CONTACT RESISTANCE : 20mΩ (max.)

INSULATION RESISTANCE : 1,000MΩMIN

WITHSTAND VOLTAGE : 800V AC/MINUTE

TEMPERATURE RANGE : -25°C TO +85°C

**FEATURES:**

AVAILABLE NUMBER OF CIRCUITS : 2 TO 12

MATERIAL : NYLON 66 UL 94V-0

ACCEPTS : 2018TS CRIMP TERMINAL

MATES WITH 2018R SERIES HOUSING

**Dimensional and Order Information**

Poles	Part No	DIM:(mm)			
		A	B	C	D
2	2018P-02	2.50	5.50	5.70	10.00
3	2018P-03	5.00	8.00	8.20	12.50
4	2018P-04	7.50	10.50	10.70	15.00
5	2018P-05	10.00	13.00	15.70	20.00
6	2018P-06	12.50	15.50	18.20	22.50
7	2018P-07	15.00	18.00	15.00	18.00
8	2018P-08	17.50	20.50	20.70	25.00
9	2018P-09	20.00	23.00	23.20	27.50
10	2018P-10	22.50	25.50	25.70	30.00
11	2018P-11	25.00	28.00	28.20	32.50
12	2018P-12	27.50	30.50	30.70	35.00